

DLO series - Extra large - Rubber hose



ID (in)

1/2"

Flow rate (cfm)

30

Technology

Pipe locked with ratchet stop

Length (ft)

98'

Swivel inlet BSP male thread

1/2" MBSP

Max operating pressure

174 psi

Coupler

ISI 11EB

Weight (lb)

85.99

Construction

Epoxy-coated steel case

Connection


3.3 ft of inlet supply hose

Equipped with

Fixed bracket

Description

Reference	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet BSPP male thread	Weight (lb)
DLO 1330IS	1/2"	98'	ISI 11EB	30	1/2" MBSP	85.99
DLO 1625IS	5/8"	82'	ISI 11EB	60	1/2" MBSP	90.40
DLO 1920IS	3/4"	65'	ISI 11EB	85	1" MBSP	92.61
DLO 1330US	1/2"	98'	USI 11EB	30	1/2" MBSP	85.99
DLO 1625US	5/8"	82'	USI 11EB	60	1/2" MBSP	90.40
DLO 1920US	3/4"	65'	USI 11EB	85	1" MBSP	92.61
DLO 1330ES	1/2"	98'	ESI 11EB	30	1/2" MBSP	85.99
DLO 1625ES	5/8"	82'	ESI 11EB	60	1/2" MBSP	90.40
DLO 1920ES	3/4"	65'	ESI 11EB	85	1" MBSP	92.61

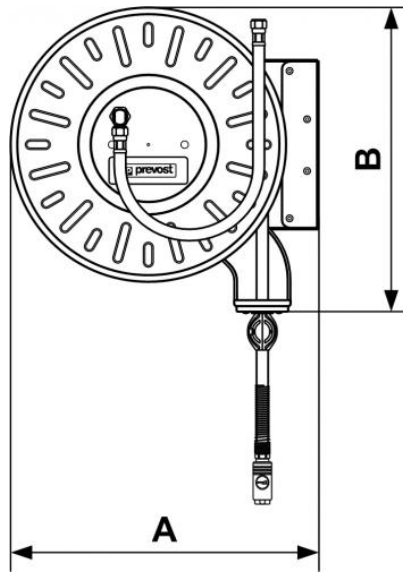

Dimensions

Reference	A mm	B mm
DLO 1330IS	615	610
DLO 1625IS	615	610
DLO 1920IS	615	610
DLO 1330US	615	610
DLO 1625US	615	610
DLO 1920US	615	610
DLO 1330ES	615	610
DLO 1625ES	615	610
DLO 1920ES	615	610