


prevoS1 blow gun with OSHA composite nozzle - Pocket model



Blowing force (at 87 psi (Ozf))	Dynamic pressure ((psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi (cfm))	Noise level (at 87 psi (dBA))
6	7.2	8.2	89
Max operating pressure	Temperature	Construction	Highlight
174 psi	+5°F to +158°F	Polyamide composite body	Compact
Connection			
Built-in plug			

Description				
Reference	Blowing force (at 87 psi (Ozf))	Dynamic pressure ((psi) at 0.39 inches, at 87 psi)	Air consumption (at 87 psi (cfm))	Noise level (at 87 psi (dBA))

APG 06OSH	6	7.2	8.2	89
-----------	---	-----	-----	----

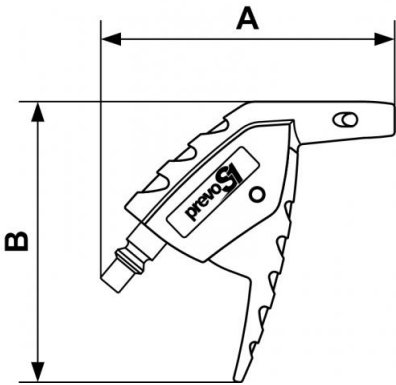

Dimensions		
Reference	A inch	B inch
APG 06OSH	0.31824146981627	0.30511811023622