

Female thread double wall bracket - Outlet 2 couplers and drain



Inlet BSPP female thread
G 1/2

Outlet BSPP female thread
G 1/2


Operating pressure
0 to 16 bar

Temperature
-20°C to +80°C

Construction
Aluminium alloy

Equipped with
Manual drain

Description				
Reference	Inlet BSPP female thread	Outlet BSPP female thread	Inlet NPT female thread	Outlet NPT female thread
MF 103S2	G 1/2	G 1/2	1/2" FNPT	1/2" FNPT
MF 203S2			3/4" FNPT	1/2" FNPT
MF 204S2				

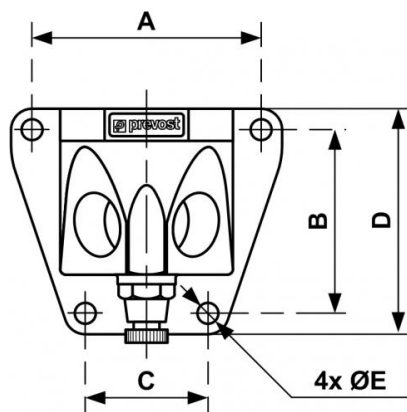

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
MF 103S2	71	57	38	70	6.5
MF 203S2	0.23293963254593	0.18700787401575	0.1246719160105	0.24278215223097	0.021325459317585
MF 204S2	0.23293963254593	0.18700787401575	0.1246719160105	0.24278215223097	0.021325459317585