


PPS1 RSIM - Parallel male thread valves with fittings for pipe



<u>For pipe OD (in)</u> 1/2"	<u>NPT male thread</u> 1/2" MNPT	<u>Technology</u> PPS Grip Concept	<u>Operating pressure</u> 0 to 232 psi
<u>Vacuum capability</u> -29 inHg (vacuum 98%)	<u>Temperature</u> -4°F to +176°F	<u>Construction</u> Pipe and fittings: aluminum	<u>Highlight</u> Scalable system
<u>Meets standards</u> ASME B31.3 REACH			

Description		
Reference	For pipe OD (in)	NPT male thread
PPS1 RSIM16253	1/2"	1/2" MNPT
PPS1 RSIM20253	3/4"	1/2" MNPT
PPS1 RSIM25254	1"	3/4" MNPT
PPS1 RSIM32255	1 1/4"	1" MNPT
PPS1 RSIM40256	1 1/2"	1 1/4" MNPT

Reference	For pipe OD (in)	NPT male thread
PPS1 RSIM50257	2"	1 1/2" MNPT

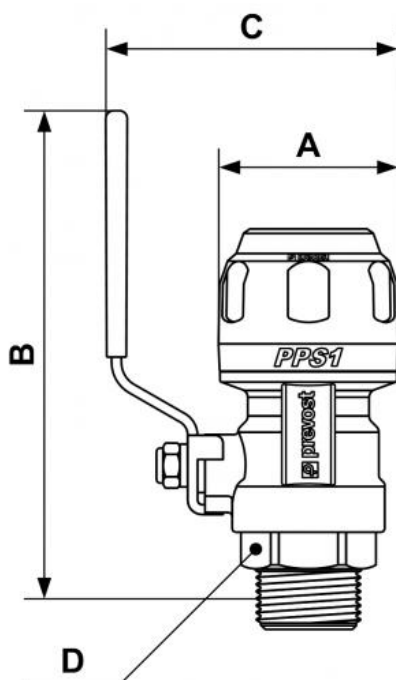

Dimensions				
Reference	A inch	B inch	C inch	D inch
PPS1 RSIM16253	1.26	5.118	2.52	0.945
PPS1 RSIM20253	1.496	5.118	2.598	0.945
PPS1 RSIM25254	1.811	5.236	2.953	1.063
PPS1 RSIM32255	2.244	6.299	3.346	1.417
PPS1 RSIM40256	2.677	6.634	3.902	1.85
PPS1 RSIM50257	3.307	8.465	4.823	1.968