

Female coupler



NPT female thread

3/8" FNPT

Profile

Automotive Interchange

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

29 to 174 psi

Flow rate at 100 psi

120 cfm ($\Delta P = 10$ psi)

ID Passage

1/2" body size

Temperature

+5°F to +158°F


Construction

Polyamide composite body

Highlight

Anti-static Excellent
efficiency Non scratch

Description		
Reference	BSPF female thread	NPT female thread
USI 111104EB	3/4" FBSP	3/8" FNPT
USI 111103EB	1/2" FBSP	1/2" FNPT
USI 111202EB		3/4" FNPT
USI 111203EB		
USI 111204EB		

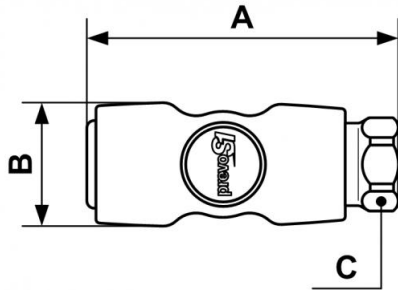

Dimensions

Reference	A inch	B inch	C inch
USI 111104EB	111	37	30
USI 111103EB	103	37	26
USI 111202EB	0.32808398950131	0.12139107611549	0.085301837270341
USI 111203EB	0.33464566929134	0.12139107611549	0.085301837270341
USI 111204EB	0.35433070866142	0.12139107611549	0.098425196850394