

## Male coupler



### NPT male thread

3/4" MNPT

### Operating pressure

29 to 174 psi

### Temperature

+5°F to +158°F

### Profile

Automotive Interchange

### Flow rate at 100 psi

120 cfm (?P : 10 psi)

### Construction

Polyamide composite body

### Technology

"One push" safety system (avoids hose whip)


### ID Passage

1/2" body size

### Highlight

Anti-static Excellent efficiency Non scratch

Description		
Reference	NPT male thread	BSPP male thread
USI 111254EB	3/4" MNPT	3/4" MBSP
USI 111253EB	1/2" MNPT	1/2" MBSP
USI 111252EB	3/8" MNPT	3/8" MBSP
USI 111154EB		
USI 111153EB		
USI 111152EB		

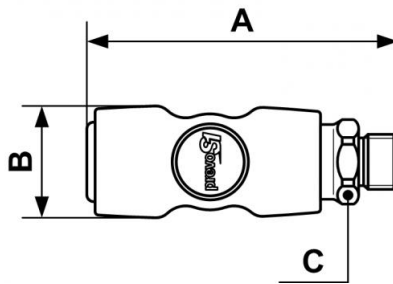

Dimensions			
Reference	A mm	B mm	C mm
USI 111254EB	118	37	30
USI 111253EB	116	37	26
USI 111252EB	112	37	26
USI 111154EB	115	37	32

Reference	A mm	B mm	C mm
<b>USI 111153EB</b>	110	37	26
<b>USI 111152EB</b>	108	37	26