


Metal nozzle blow gun



<u>BSPP female thread</u> G 1/4	<u>Air consumption (at 6 bar (Nm3/h))</u> 14.5	<u>Sound level (at 6 bar (dBA))</u> 86	<u>Bent tube length (mm)</u> 500
<u>Max operating pressure</u> 10 bar	<u>Construction</u> Polyamide composite body	<u>Highlight</u> Adjust gradually blowing	

Description										
Reference	BSPP female thread	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))	Bent tube length (mm)	NPT female thread	Air consumption (at 87 psi)	Noise level (at 87 psi (dBA))	Blowing force	Dynamic pressure (at 87 psi at 4")(psi)	Length (tube (in))
27102 MB20	G 1/4	14.5	86	500	1/4" FNPT	8.8 cfm	86	9.3	25	Bent 13"
27202 MB13	G 1/4	9.4	81	1000	1/4" FNPT	8.5 cfm	86	8.6	22	Bent 20"

Reference	BSPP female thread	Air consumption (at 6 bar (Nm ³ /h))	Sound level (at 6 bar (dBA))	Bent tube length (mm)	NPT female thread	Air consumption (at 87 psi)	Noise level (at 87 psi (dBA))	Blowing force	Dynamic pressure (at 87 psi at 4")(psi)	Length (tube (in))
27202 MB20					1/4" FNPT	8.8 cfm	86	9.3	25	Straight 13"
27202 MS13					1/4" FNPT	8.5 cfm	86	8.6	22	Straight 20"
27202 MS20										
27102 MB40OSH										

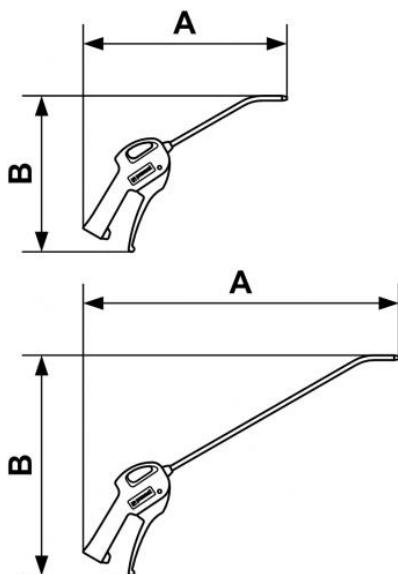

Dimensions		
Reference	A inch	B inch
27102 MB20	514	380
27202 MB13	1.2040682414698	0.82020997375328
27202 MB20	1.6863517060368	1.246719160105
27202 MS13	1.1745406824147	0.91535433070866
27202 MS20	1.6601049868766	1.1942257217848
27102 MB40OSH	957	650