

## Male coupler - Stainless Steel



### BSPB male thread

1/4" MBSP

### Technology

Push button

### Operating pressure

0 to 174 psi

### Flow rate at 100 psi

32 cfm ( $\Delta P = 10$  psi)

### ID Passage

1/4" body size

### Temperature

+5°F to +158°F

### Construction

Composite body Stainless  
steel valve

### Applications

Corrosive atmospheres

### Highlight

Non scratch

## Description

Reference

BSPB male thread

**PROXI 061151**


1/4" MBSP

**PROXI 061152**

3/8" MBSP

**PROXI 061153**

1/2" MBSP

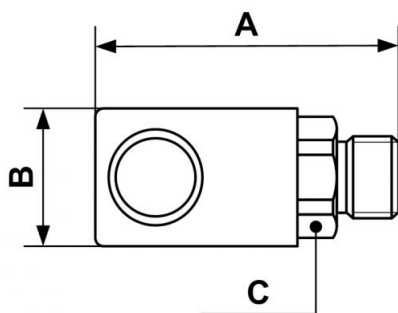

## Dimensions

| Reference           | A inch           | B inch            | C inch            |
|---------------------|------------------|-------------------|-------------------|
| <b>PROXI 061151</b> | 0.20341207349081 | 0.091863517060367 | 0.075459317585302 |
| <b>PROXI 061152</b> | 0.20341207349081 | 0.091863517060367 | 0.075459317585302 |
| <b>PROXI 061153</b> | 0.20997375328084 | 0.091863517060367 | 0.075459317585302 |