

ALTO 3 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket and diverter block



BSPP female thread

G 1/2

Flow rate (l/min at 7 bar ?P

1bar) = 2800

Max operating pressure (bar)

12

Filtration (µm)

25

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ?P	Max operating pressure (bar)	Filtration (µm)	NPT female thread	Flow rate (cfm at 87 psi ?P	Max operating pressure (psi)
TB SME3	G 1/2	1bar) = 2800	12	25	1/2" FNPT	14psi) = 98.90	174
TB SME203				25			

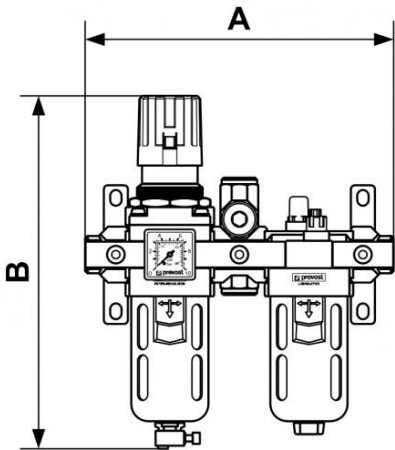

Dimensions		
Reference	A inch	B inch
TB SME3	245	280
TB SME203	9.606	11.024