


## Open Hose Reel - High pressure stainless steel - Hot Water - HP reinforced rubber hose



<b>ID (in)</b> 5/16"	<b>Length (ft)</b> 50'	<b>Outlet</b> 3/8" MBSP + M22 x 1.5	<b>Swivel inlet BSPP female thread</b> 3/8" FBSP
<b>Weight (lb)</b> 35.28	<b>Technology</b> Pipe locked with ratchet stop	<b>Max operating pressure</b> 5800 psi	<b>Temperature</b> -40°F to +302°F
<b>Equipped with</b> Fixed bracket			

Description					
Reference	ID (in)	Length (ft)	Outlet	Swivel inlet BSPP female thread	Weight (lb)
<b>DMO 0815HPI</b>	5/16"	50'	3/8" MBSP + M22 x 1.5	3/8" FBSP	35.28

Reference	ID (in)	Length (ft)	Outlet	Swivel inlet BSPP female thread	Weight (lb)
<b>DGO 0820HPI</b>	5/16"	65'	3/8" MBSP + M22 x 1.5	3/8" FBSP	46.30

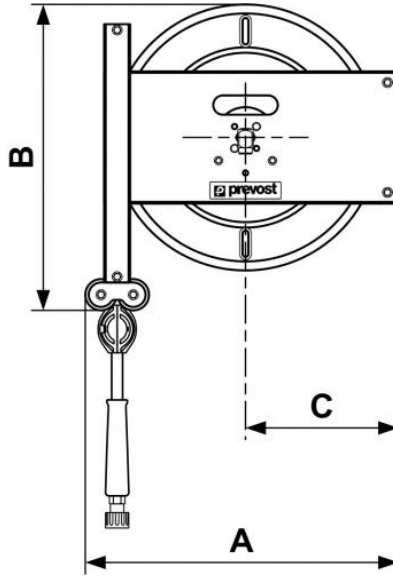

### Dimensions

Reference	A inch	B inch	C inch
<b>DMO 0815HPI</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 0820HPI</b>	1.5912073490814	1.5583989501312	0.77755905511811