

Male flow regulator with knob (control out) - Male BSPT to metric
tube - RPM OR



BSPT male thread

1/8" MBSP

For tube OD (mm)

4

Operating pressure

0 to 145 psi

Temperature

+32°F to +140°F


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPT male thread	For tube OD (mm)
RPM OR0400	1/8" MBSP	4
RPM OR0401	1/4" MBSP	4
RPM OR0600	R 1/8	6
RPM OR0601	1/4" MBSP	6
RPM OR0602	3/8" MBSP	6

Reference	BSPT male thread	For tube OD (mm)
RPM OR0603	1/2" MBSP	6
RPM OR0800	1/8" MBSP	8
RPM OR0801	1/4" MBSP	8
RPM OR0802	3/8" MBSP	8
RPM OR0803	1/2" MBSP	8
RPM OR1000	1/8" MBSP	10
RPM OR1001	1/4" MBSP	10
RPM OR1002	3/8" MBSP	10
RPM OR1003	1/2" MBSP	10
RPM OR1201	1/4" MBSP	12
RPM OR1202	3/8" MBSP	12
RPM OR1203	1/2" MBSP	12

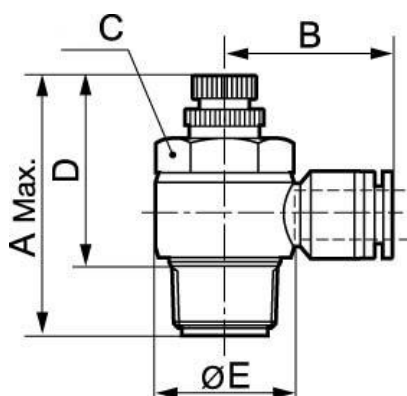

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
RPM OR0400	0.12795275590551	0.071522309711286	0.032808398950131	0.10334645669291	0.04757217847769
RPM OR0401	0.16404199475066	0.078740157480315	0.045931758530184	0.13451443569554	0.059711286089239
RPM OR0600	39	23	10	31.5	14.5
RPM OR0601	0.16404199475066	0.083661417322835	0.045931758530184	0.13451443569554	0.059711286089239
RPM OR0602	0.19356955380577	0.088910761154856	0.062335958005249	0.15748031496063	0.072178477690289
RPM OR0603	0.20669291338583	0.098753280839895	0.078740157480315	0.16404199475066	0.08989501312336
RPM OR0800	0.12795275590551	0.080708661417323	0.032808398950131	0.10334645669291	0.04757217847769
RPM OR0801	0.16404199475066	0.087926509186352	0.045931758530184	0.13451443569554	0.059711286089239
RPM OR0802	0.19356955380577	0.094488188976378	0.062335958005249	0.15748031496063	0.072178477690289
RPM OR0803	0.20669291338583	0.1000656167979	0.078740157480315	0.16404199475066	0.08989501312336
RPM OR1000	0.12795275590551	0.093503937007874	0.032808398950131	0.10334645669291	0.04757217847769
RPM OR1001	0.16404199475066	0.10170603674541	0.045931758530184	0.13451443569554	0.059711286089239
RPM OR1002	0.19356955380577	0.10170603674541	0.062335958005249	0.15748031496063	0.072178477690289
RPM OR1003	0.20669291338583	0.11154855643045	0.078740157480315	0.16404199475066	0.08989501312336
RPM OR1201	0.16404199475066	0.10433070866142	0.045931758530184	0.13451443569554	0.059711286089239

Reference	A inch	B inch	C inch	D inch	E inch
RPM OR1202	0.19356955380577	0.11154855643045	0.062335958005249	0.15748031496063	0.04757217847769
RPM OR1203	0.20669291338583	0.11745406824147	0.078740157480315	0.16404199475066	0.08989501312336