

## Plug-in Y - Metric tube - RPY PT



### For tube OD (x2) (mm)

4

### Fitting ID (mm)

4

### Operating pressure

0 to 145 psi

### Temperature

+32°F to +140°F


### Construction

Polymer and nickel-plated  
brass

## Description

| Reference  | For tube OD (x2) (mm) | Fitting ID (mm) |
|------------|-----------------------|-----------------|
| RPY PT0404 | 4                     | 4               |
| RPY PT0606 | 6                     | 6               |
| RPY PT0808 | 8                     | 8               |
| RPY PT1010 | 10                    | 10              |
| RPY PT1212 | 12                    | 12              |

| Reference         | For tube OD (x2) (mm) | Fitting ID (mm) |
|-------------------|-----------------------|-----------------|
| <b>RPY PT1414</b> | 14                    | 14              |
| <b>RPY PT1616</b> | 16                    | 16              |

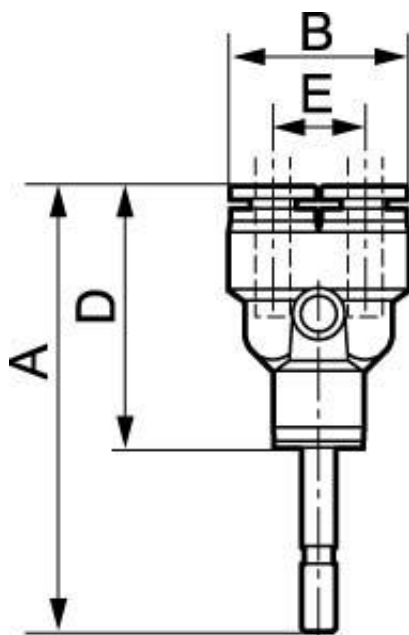

| Dimensions        |                  |                   |                  |                   |
|-------------------|------------------|-------------------|------------------|-------------------|
| Reference         | A inch           | B inch            | D inch           | E inch            |
| <b>RPY PT0404</b> | 0.15912073490814 | 0.065616797900262 | 0.10170603674541 | 0.034448818897638 |
| <b>RPY PT0606</b> | 0.18044619422572 | 0.083989501312336 | 0.10826771653543 | 0.042650918635171 |
| <b>RPY PT0808</b> | 0.18143044619423 | 0.090551181102362 | 0.10990813648294 | 0.04757217847769  |
| <b>RPY PT1010</b> | 0.23228346456693 | 0.11023622047244  | 0.1492782152231  | 0.059055118110236 |
| <b>RPY PT1212</b> | 0.24048556430446 | 0.12992125984252  | 0.15748031496063 | 0.065616797900262 |
| <b>RPY PT1414</b> | 0.24868766404199 | 0.1489501312336   | 0.16076115485564 | 0.076443569553806 |
| <b>RPY PT1616</b> | 0.25918635170604 | 0.15616797900262  | 0.16732283464567 | 0.080380577427821 |