

## Complete portable kit for 22/44 lb grease drums



### Includes

- pump for 22/44 lb drum - tube length: 16.1 in - cover + sealing diaphragm - distribution gun - 13 ft rubber hose - carrying handle

### Outlet pressure

5800 psi (air pressure at 100 psi)

### Pressure ratio

58:1

### Technology

Piston dual action

### Flow rate

300 z/min (for air pressure 87 psi)

### BSPP male thread

Grease outlet: G 1/4


### Operating pressure

43 to 100 psi

### BSPP female thread

Air inlet: 1/4" FBSP

Description	
Reference	Includes
<b>EPG KR20</b>	- pump for 22/44 lb drum - tube length: 16.1 in - cover + sealing diaphragm - distribution gun - 13 ft rubber hose - carrying handle
<b>EPG KRF20</b>	Complete portable kit for 22/44 lb grease drums with FRL
<b>EPG KRFC20</b>	Complete portable kit for 22/44 lb grease drums with FRL and transport cart

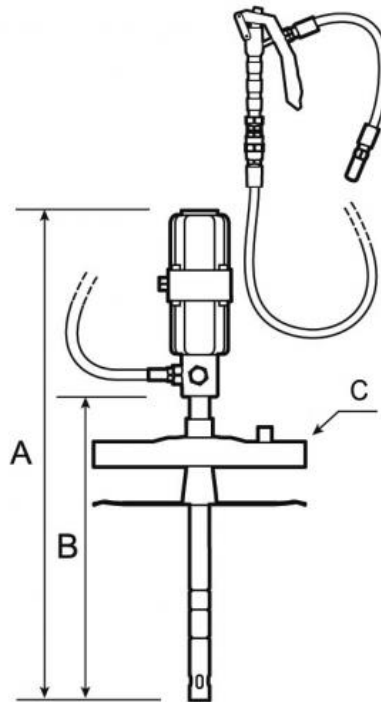

Dimensions			
Reference	A mm	B mm	C mm
<b>EPG KR20</b>	680	410	280
<b>EPG KRF20</b>	680	410	280

Reference	A mm	B mm	C mm
EPG KRFC20	680	410	280