

## Complete portable kit for 22/44 lb grease drums



### Includes

- pump for 22/44 lb drum -  
tube length: 16.1 in - cover  
+ sealing diaphragm -  
distribution gun - 13 ft  
rubber hose - carrying  
handle

### Technology

Piston dual action

### Operating pressure

43 to 100 psi

### Outlet pressure

5800 psi (air pressure at 100  
psi)

### Flow rate

300 z/min (for air pressure  
87 psi)

### BSPP female thread

Air inlet : 1/4" FBSP


### Pressure ratio

58:1

### BSPP male thread

Grease outlet: G 1/4

Description	
Reference	Includes
<b>EPG KR20</b>	- pump for 22/44 lb drum - tube length: 16.1 in - cover + sealing diaphragm - distribution gun - 13 ft rubber hose - carrying handle
<b>EPG KRF20</b>	Complete portable kit for 22/44 lb grease drums with FRL
<b>EPG KRFC20</b>	Complete portable kit for 22/44 lb grease drums with FRL and transport cart

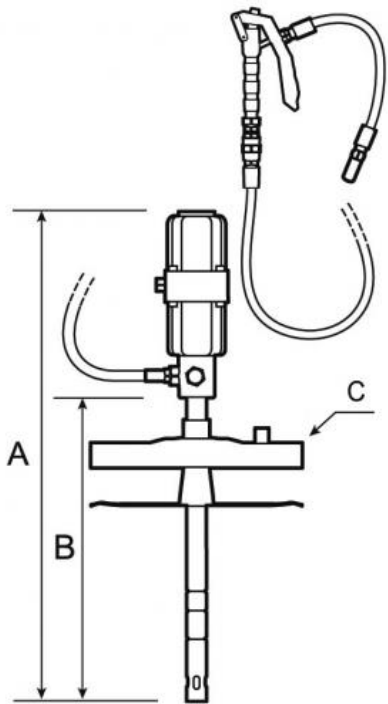

Dimensions			
Reference	A inch	B inch	C inch
EPG KR20	2.2309711286089	1.3451443569554	0.91863517060368
EPG KRF20	2.2309711286089	1.3451443569554	0.91863517060368
EPG KRFC20	2.2309711286089	1.3451443569554	0.91863517060368