

Male flow regulator with knob (bi-directional) - Fractional inch tube to male NPT - RPM BR



NPT male thread

1/8" MNPT

For tube OD (in)

1/8

Operating pressure

0 to 145 psi

Temperature

+32°F to +140°F


Construction

Polymer and nickel-plated
brass

Description

Reference	NPT male thread	For tube OD (in)
RPM BR1820	1/8" MNPT	1/8
RPM BR5320	1/8" MNPT	5/32
RPM BR3120	1/8" MNPT	3/16
RPM BR3121	1/4" MNPT	3/16
RPM BR3122	3/8" MNPT	3/16

Reference	NPT male thread	For tube OD (in)
RPM BR4120	1/8" MNPT	1/4
RPM BR4121	1/4" MNPT	1/4
RPM BR4122	3/8" MNPT	1/4
RPM BR5120	1/8" MNPT	5/16
RPM BR5121	1/4" MNPT	5/16
RPM BR5122	3/8" MNPT	5/16
RPM BR5123	1/2" MNPT	5/16
RPM BR3821	1/4" MNPT	3/8
RPM BR3822	3/8" MNPT	3/8
RPM BR3823	1/2" MNPT	3/8
RPM BR2122	3/8" MNPT	1/2
RPM BR2123	1/2" MNPT	1/2

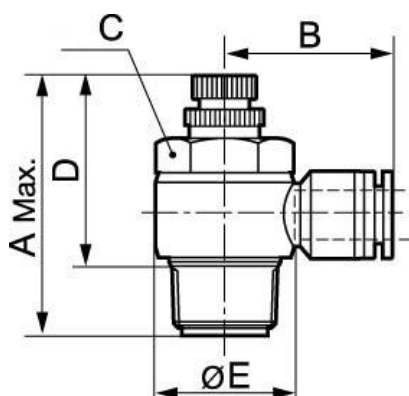

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
RPM BR1820	0.071522309711286	0.026246719160105	147.5	0.039370078740158	0.032808398950131
RPM BR5320	0.071522309711286	0.026246719160105	147.5	0.039370078740158	0.032808398950131
RPM BR3120	0.075459317585302	0.026246719160105	147.5	0.039370078740158	0.041994750656168
RPM BR3121	0.083661417322835	0.036089238845144	139.80971128609	0.039370078740158	0.041994750656168
RPM BR3122	0.088910761154856	0.039370078740158	147.7001312336	0.050524934383202	0.041994750656168
RPM BR4120	0.075459317585302	0.026246719160105	147.5	0.039370078740158	0.041994750656168
RPM BR4121	0.083661417322835	0.036089238845144	139.80971128609	0.039370078740158	0.041994750656168
RPM BR4122	0.088910761154856	0.039370078740158	147.7001312336	0.050524934383202	0.041994750656168
RPM BR5120	0.080708661417323	0.026246719160105	147.5	0.039370078740158	0.045275590551181
RPM BR5121	0.087926509186352	0.036089238845144	139.80971128609	0.039370078740158	0.045275590551181
RPM BR5122	0.094488188976378	0.039370078740158	147.7001312336	0.050524934383202	0.045275590551181
RPM BR5123	0.1000656167979	0.0492125984251970	0.0032808398950131	0.05741469816273	0.045275590551181
RPM BR3821	0.10170603674541	0.036089238845144	139.80971128609	0.039370078740158	0.05511811023622
RPM BR3822	0.10170603674541	0.039370078740158	147.7001312336	0.050524934383202	0.05511811023622
RPM BR3823	0.11154855643045	0.0492125984251970	0.0032808398950131	0.05741469816273	0.05511811023622

Reference	A inch	B inch	C inch	D inch	E inch
RPM BR2122	0.10892388451444	0.039370078740158	147.7001312336	0.050524934383202	0.067257217847769
RPM BR2123	0.11548556430446	0.0492125984251970	0.0032808398950131	0.05741469816273	0.067257217847769