

Tube/ male thread flow regulator one way - Metric tube to male
BPST - RPL TR



BSPT male thread

1/8" MBSP

For tube OD (mm)

4

Operating pressure

0 to 145 psi

Temperature

+32°F to +140°F


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPT male thread	For tube OD (mm)
RPL TR0400	1/8" MBSP	4
RPL TR0600	1/8" MBSP	6
RPL TR0601	1/4" MBSP	6
RPL TR0800	1/8" MBSP	8
RPL TR0801	1/4" MBSP	8

Reference	BSPT male thread	For tube OD (mm)
RPL TR0802	3/8" MBSP	8
RPL TR1001	1/4" MBSP	10
RPL TR1002	3/8" MBSP	10
RPL TR1003	1/2" MBSP	10
RPL TR1201	1/4" MBSP	12
RPL TR1202	3/8" MBSP	12
RPL TR1203	1/2" MBSP	12

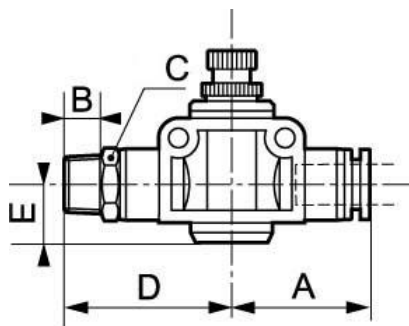

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
RPL TR0400	0.078740157480315	0.024606299212598	0.032808398950131	0.10203412073491	0.034448818897638
RPL TR0600	0.080380577427821	0.024606299212598	0.039370078740158	0.10334645669291	0.036417322834646
RPL TR0601	0.080380577427821	0.029527559055118	0.045931758530184	0.10826771653543	0.036417322834646
RPL TR0800	0.090223097112861	0.024606299212598	0.045931758530184	0.11253280839895	0.039370078740158
RPL TR0801	0.090223097112861	0.029527559055118	0.045931758530184	0.11745406824147	0.039370078740158
RPL TR0802	0.090223097112861	0.036089238845144	0.055774278215223	0.125656167979	0.039370078740158
RPL TR1001	0.10334645669291	0.029527559055118	0.055774278215223	0.13090551181102	0.04002624671916
RPL TR1002	0.10334645669291	0.036089238845144	0.055774278215223	0.13746719160105	0.04002624671916
RPL TR1003	0.10334645669291	0.042650918635171	0.068897637795276	0.14402887139108	0.04002624671916
RPL TR1201	0.12303149606299	0.029527559055118	0.062335958005249	0.14829396325459	0.051181102362205
RPL TR1202	0.12303149606299	0.036089238845144	0.062335958005249	0.15485564304462	0.051181102362205
RPL TR1203	0.12303149606299	0.042650918635171	0.068897637795276	0.16141732283465	0.051181102362205