

Male thread valve three ways - Inlet male BSPT/outlet male BSPT -
RPS DR



BSPT male thread

1/8" MBSP

Operating pressure

0 to 145 psi

Temperature


+32°F to +140°F

Construction

Polymer and nickel-plated
brass

Description	
Reference	BSPT male thread
RPS DR0000	1/8" MBSP
RPS DR0100	1/8" MBSP
RPS DR0101	1/4" MBSP
RPS DR0201	1/4" MBSP
RPS DR0202	1/8" MBSP
RPS DR0302	3/8" MBSP

Reference	BSPT male thread
RPS DR0303	1/2" MBSP

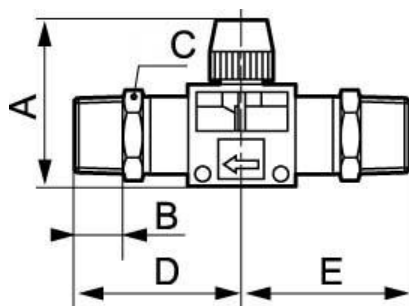

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
RPS DR0000	0.13221784776903	0.024606299212598	0.045931758530184	0.10662729658793	0.10662729658793
RPS DR0100	0.13221784776903	0.029527559055118	0.045931758530184	0.11154855643045	1.0908792650919
RPS DR0101	0.13221784776903	0.029527559055118	0.045931758530184	0.11154855643045	0.11154855643045
RPS DR0201	0.14599737532808	0.036089238845144	0.055774278215223	0.13779527559055	0.12959317585302
RPS DR0202	0.14599737532808	0.036089238845144	0.055774278215223	0.13779527559055	0.13779527559055
RPS DR0302	0.14599737532808	0.042650918635171	0.068897637795276	0.14435695538058	0.13779527559055
RPS DR0303	0.14599737532808	0.042650918635171	0.068897637795276	0.14435695538058	0.14435695538058