

Male thread/tube valve three ways - Inlet male BSPT/outlet metric tube - RPS TR



BSPT male thread

1/8" MBSP

For tube OD (mm)

6

Operating pressure

0 to 145 psi

Temperature

+32°F to +140°F


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPT male thread	For tube OD (mm)
RPS TR0600	1/8" MBSP	6
RPS TR0601	1/4" MBSP	6
RPS TR0602	3/8" MBSP	6
RPS TR0800	1/8" MBSP	8
RPS TR0801	1/4" MBSP	8
RPS TR0802	3/8" MBSP	8
RPS TR1001	1/4" MBSP	10

Reference	BSPT male thread	For tube OD (mm)
RPS TR1002	3/8" MBSP	10
RPS TR1003	1/2" MBSP	10
RPS TR1201	1/4" MBSP	12
RPS TR1202	3/8" MBSP	12
RPS TR1203	1/2" MBSP	12

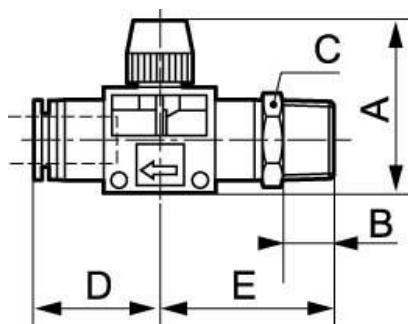

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
RPS TR0600	0.13221784776903	0.024606299212598	0.045931758530184	0.083661417322835	0.10662729658793
RPS TR0601	0.13221784776903	0.029527559055118	0.045931758530184	0.083661417322835	0.11154855643045
RPS TR0602	0.13221784776903	0.036089238845144	0.055774278215223	0.083661417322835	0.11646981627297
RPS TR0800	0.13221784776903	0.024606299212598	0.045931758530184	0.084645669291339	0.10662729658793
RPS TR0801	0.13221784776903	0.029527559055118	0.045931758530184	0.084645669291339	0.11154855643045
RPS TR0802	0.13221784776903	0.036089238845144	0.055774278215223	0.084645669291339	0.11646981627297
RPS TR1001	0.14599737532808	0.029527559055118	0.062335958005249	0.10203412073491	0.12959317585302
RPS TR1002	0.14599737532808	0.036089238845144	0.062335958005249	0.10203412073491	0.13779527559055
RPS TR1003	0.14599737532808	0.042650918635171	0.068897637795276	0.10203412073491	0.14435695538058
RPS TR1201	0.14599737532808	0.029527559055118	0.062335958005249	0.10433070866142	0.12959317585302
RPS TR1202	0.14599737532808	0.036089238845144	0.062335958005249	0.10433070866142	0.13779527559055
RPS TR1203	0.14599737532808	0.042650918635171	0.068897637795276	0.10433070866142	0.14435695538058