

Male thread/tube valve three ways - Inlet male NPT/outlet fractional inch tube - RPS TR



NPT male thread

1/4" MNPT

For tube OD (in)

1/8

Operating pressure

0 to 145 psi

Temperature

+32°F to +140°F


Construction

Polymer and nickel-plated
brass

Description

Reference	NPT male thread	For tube OD (in)
RPS TR4120	1/4" MNPT	1/8
RPS TR4121	1/4" MNPT	1/4
RPS TR4122	1/4" MNPT	3/8
RPS TR5120	5/16" MNPT	1/8
RPS TR5121	5/16" MNPT	1/4
RPS TR5122	5/16" MNPT	3/8
RPS TR3821	1/4" MNPT	3/8

Reference	NPT male thread	For tube OD (in)
RPS TR3822	3/8" MNPT	3/8
RPS TR2122	1/2" MNPT	3/8
RPS TR2123	1/2" MNPT	1/2

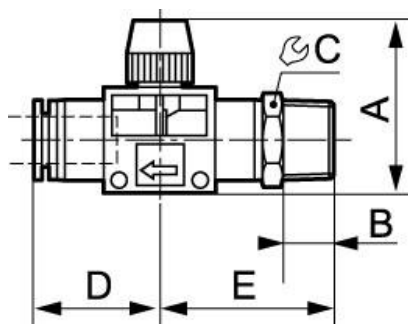

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
RPS TR4120	0.13221784776903	0.024606299212598	139.80971128609	0.083661417322835	0.10826771653543
RPS TR4121	0.13221784776903	0.029527559055118	139.80971128609	0.083661417322835	0.11811023622047
RPS TR4122	0.13221784776903	0.036089238845144	140.00984251969	0.083661417322835	0.11975065616798
RPS TR5120	0.13221784776903	0.024606299212598	139.80971128609	0.084645669291339	0.10826771653543
RPS TR5121	0.13221784776903	0.029527559055118	139.80971128609	0.084645669291339	0.11154855643045
RPS TR5122	0.13221784776903	0.036089238845144	140.00984251969	0.084645669291339	0.11975065616798
RPS TR3821	0.14599737532808	0.029527559055118	140.00984251969	0.10203412073491	0.13615485564304
RPS TR3822	0.14599737532808	0.036089238845144	140.00984251969	0.10203412073491	0.14107611548556
RPS TR2122	0.14599737532808	0.036089238845144	148.11351706037	0.10433070866142	0.14107611548556
RPS TR2123	0.14599737532808	0.039370078740158	148.11351706037	0.10433070866142	0.15255905511811