

Bulkhead fitting - Fractional inch tube - RPU TT



For tube OD (in)

1/8

Drill Ø (in)

0.4

Panel depth (in)

0.51

Operating pressure

0 to 145 psi

Temperature

+32°F to +140°F


Construction

Polymer and nickel-plated
brass

Description

Reference	For tube OD (in)	Drill Ø (in)	Panel depth (in)
RPU TT1818	1/8	0.4	0.51
RPU TT5353	5/32	0.4	0.51
RPU TT3131	3/16	0.5	0.59
RPU TT4141	1/4	0.5	0.59
RPU TT5151	5/16	0.8	0.59

Reference	For tube OD (in)	Drill Ø (in)	Panel depth (in)
RPU TT3838	3/8	0.9	0.79
RPU TT2121	1/2	1.0	0.79

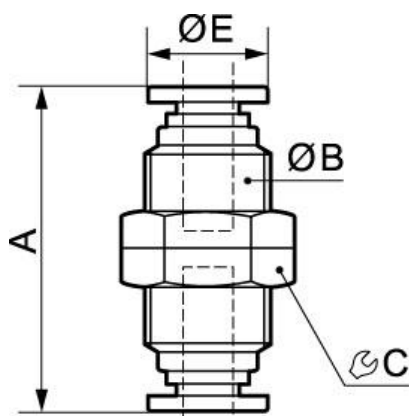

Dimensions				
Reference	A inch	B inch	C inch	E inch
RPU TT1818	0.11154855643045	0.039370078740158	0.045931758530184	0.032808398950131
RPU TT5353	0.11154855643045	0.039370078740158	0.045931758530184	0.032808398950131
RPU TT3131	0.11811023622047	0.045931758530184	0.055774278215223	0.041994750656168
RPU TT4141	0.11811023622047	0.045931758530184	0.055774278215223	0.041994750656168
RPU TT5151	0.12959317585302	0.05249343832021	0.062335958005249	0.045275590551181
RPU TT3838	0.13320209973753	0.065616797900262	0.078740157480315	0.05511811023622
RPU TT2121	0.13287401574803	0.072178477690289	0.085301837270341	0.067257217847769