

Male flow regulator with adjusting screw (control in) - Fractional inch tube to 10-32 UNF - RPV IG



UNF thread

10-32 UNF

For tube OD (in)

1/8

Operating pressure

0 to 145 psi

Temperature


+32°F to +140°F

Construction

Polymer and nickel-plated
brass

Description

Reference	UNF thread	For tube OD (in)
RPV IG1826	10-32 UNF	1/8
RPV IG5326	10-32 UNF	5/32
RPV IG3126	10-32 UNF	3/16
RPV IG4126	10-32 UNF	1/4

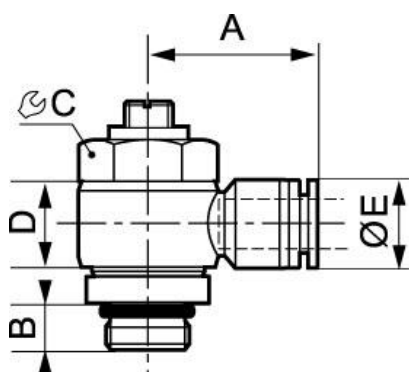

Dimensions

Reference	A inch	B inch	C inch	D inch	E inch
RPV IG1826	0.064632545931759	0.013123359580053	139.406167979	0.030183727034121	0.032808398950131
RPV IG5326	0.064632545931759	0.013123359580053	139.406167979	0.030183727034121	0.032808398950131
RPV IG3126	0.073818897637795	0.013123359580053	139.406167979	0.030183727034121	0.041994750656168
RPV IG4126	0.073818897637795	0.013123359580053	0.0032808398950131	0.030183727034121	0.041994750656168