

Tapered male thread coupling



BSP male thread

G 1/4

Technology

Safety (avoid hose whip)

Operating pressure

0 to 16 bar

Flow rate at 6 bar

833 l/min ($\Delta P = 0,6$ bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction


Body : Stainless steel

Highlight

Anti-static

Description

Reference	NPT male thread	BSP male thread
CSM 061253	1/2" MNPT	G 1/4
CSM 061251	1/4" MNPT	
CSM 061252	3/8" MNPT	
CSM 061151		

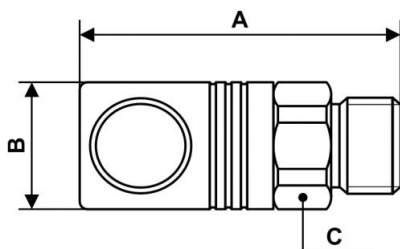

Dimensions

Reference	A inch	B inch	C inch
CSM 061253	0.20669291338583	0.072178477690289	0.075459317585302
CSM 061251	0.19356955380577	0.072178477690289	0.065616797900262
CSM 061252	0.19356955380577	0.072178477690289	0.065616797900262
CSM 061151	54.5	22	20