

## Hose stem coupler



### For hose ID

3/8" Hose Barb

### Technology

Safety (avoid hose whip)

### Operating pressure

29 to 232 psi

### Flow rate at 100 psi

165 cfm (?P = 10 psi)

### ID Passage

1/2" body size

### Temperature

+5°F to +158°F

### Construction


Body : Stainless steel

### Highlight

Anti-static

## Description

| Reference         | For hose ID    |
|-------------------|----------------|
| <b>CSM 111810</b> | 3/8" Hose Barb |
| <b>CSM 111813</b> | 1/2" Hose Barb |
| <b>CSM 111816</b> | 5/8" Hose Barb |
| <b>CSM 111819</b> | 3/4" Hose Barb |

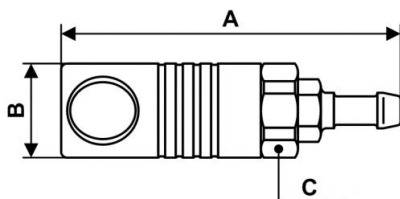

| Dimensions        |                  |                  |                   |
|-------------------|------------------|------------------|-------------------|
| Reference         | A inch           | B inch           | C inch            |
| <b>CSM 111810</b> | 0.39041994750656 | 0.10826771653543 | 0.098425196850394 |
| <b>CSM 111813</b> | 0.36745406824147 | 0.10826771653543 | 0.098425196850394 |
| <b>CSM 111816</b> | 0.36417322834646 | 0.10826771653543 | 0.098425196850394 |
| <b>CSM 111819</b> | 0.48228346456693 | 0.10826771653543 | 0.098425196850394 |