

2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket



Female thread
3/8"

Flow rate (cfm at 87 psi ?P
14psi) = 44.15

Max operating pressure (psi)
174

Filtration (µm)
25


Temperature
+41°F to +122°F

Construction
Body : Aluminium
Polycarbonate bowl with
metallic protection

Equipped with
Manual drain

Description

Reference	Female thread	Flow rate (cfm at 87 psi ?P	Max operating pressure (psi)	Filtration (µm)
TB SM202	3/8"	14psi) = 44.15	174	25

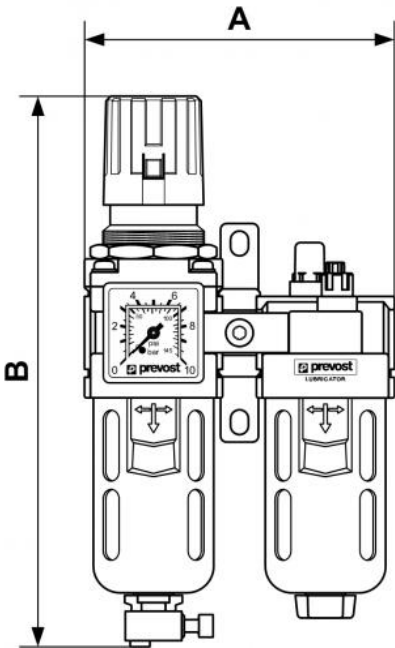

Dimensions		
Reference	A inch	B inch
TB SM202	0.40682414698163	0.72178477690289