

Filter-Regulator (gauge included) with wall bracket



NPT female thread
3/8" FNPT

**Flow rate (cfm at 87 psi
?p**
14psi) = 63.54

**Max operating pressure
(psi)**
174

Filtration (µm)
25


Temperature
+41°F to +122°F

Construction
Body : Aluminium
Polycarbonate bowl with
metallic protection

Equipped with
Manual drain

Description

Reference	NPT female thread	Flow rate (cfm at 87 psi ?p	Max operating pressure (psi)	Filtration (µm)
TM SM202	3/8" FNPT	14psi) = 63.54	174	25

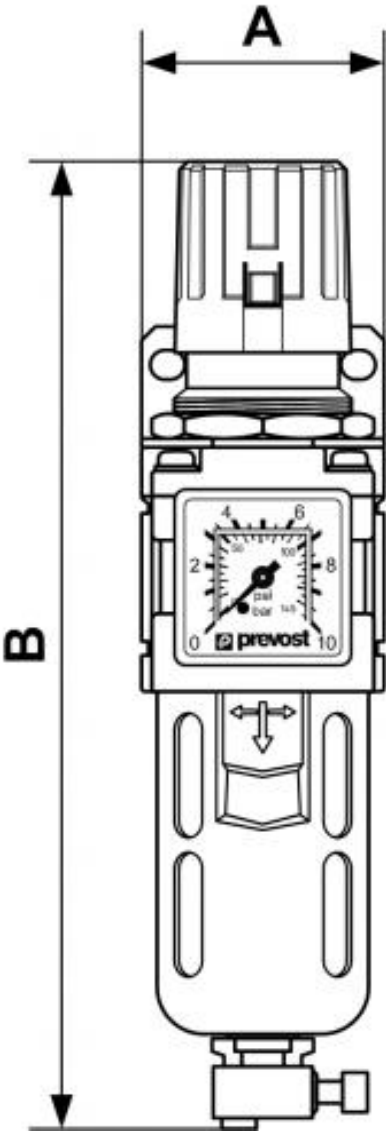

Dimensions		
Reference	A inch	B inch
TM SM202	0.18044619422572	0.72178477690289