

Threaded swivel coupler



NPT female thread

3/8" FNPT

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

29 to 174 psi

Flow rate at 100 psi

34 cfm (?P = 10 psi)

ID Passage

1/4" body size

Temperature

+5°F to +158°F

Construction

Composite body

Highlight

Anti-static Non scratch

Description

Reference


NPT female thread

USI 061201SW

1/4" FNPT

USI 061202SW

3/8" FNPT

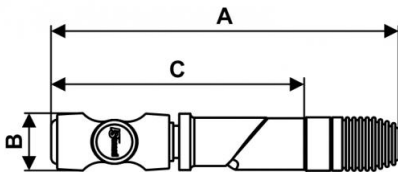

Dimensions			
Reference	A inch	B inch	C inch
USI 061201SW	0.23293963254593	0.098425196850394	0.065616797900262
USI 061202SW	0.5741469816273	0.098425196850394	0.42093175853018