

Filter-Regulator-Lubricator ALTO 4 with a non-lubricated outlet on a gantry



Interchange

Industrial 1/2"

Inlet 1 plug

IRP 11

Filtration (µm)

25

Outlet 3 couplings

2 x ISI 11EB 1 x ISI 06 (non lubricated outlet)

Flow rate (cfm at 87 bar ΔP : 8.7 bar)

147 29.7

Temperature

+41°F to +122°F

Construction

Body : Aluminium
Polycarbonate bowl with metallic protection

Highlight


Easy to transport

Equipped with

Coupler and adapter

Description

Reference	Interchange	Inlet 1 plug	Filtration (µm)	Outlet 3 couplings	Flow rate (cfm at 87 bar ΔP : 8.7 bar)	Flow rate (cfm at 87 bar ΔP
PTE LIS	Industrial 1/2"	IRP 11	25	2 x ISI 11EB 1 x ISI 06 (non lubricated outlet)	147 29.7	8.7 bar) = 126
PTE LUS	Automotive 1/2"	URP 11	25	2x USI 11 1x USI 06 (non lubricated outlet)		

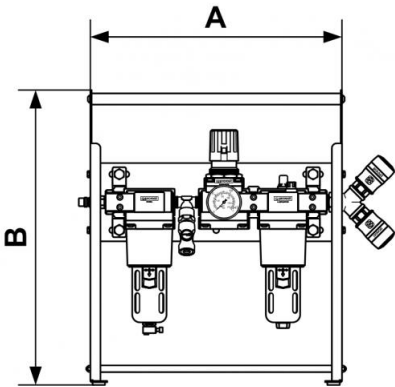

Dimensions		
Reference	A inch	B inch
PTE LIS	17.638	20.575
PTE LUS	1.4698162729659	1.7145669291339