

Combination Micronic - Submicronic - Carbon filter - Regulator



Interchange

Industrial 1/4"

Inlet NPT female thread

1/2" FNPT

Outlet 2 couplings

ISI 06

Flow rate (cfm at 100 psi)

50

Operating pressure

29 to 174 psi

Temperature

+34°F to +150°F

Construction

Aluminum body and bowl


Equipped with

Quick release safety couplings and adaptors
prevoS1

Description

Reference	Inlet BSPP female thread	Outlet 2 couplings	Flow rate (in m³/h at 7 bar)	Interchange	Inlet NPT female thread	Flow rate (cfm at 100 psi)
MBCR 12ES	G 1/2	ESI 07	85	Industrial 1/4"	1/2" FNPT	50
MBCR 203IS		ISI 06		Automotive 1/4"	1/2" FNPT	50
MBCR 203US		USI 06		High Flow 3/8"	1/2" FNPT	50

Reference	Inlet BSPP female thread	Outlet 2 couplings	Flow rate (in m ³ /h at 7 bar)	Interchange	Inlet NPT female thread	Flow rate (cfm at 100 psi)
MBCR 203ES		ESI 07				

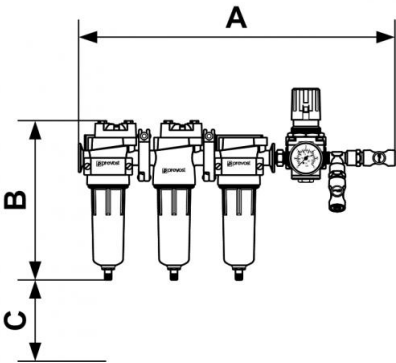

Dimensions			
Reference	A inch	B inch	C inch
MBCR 12ES	570	280	76
MBCR 203IS	1.0269028871391	1.0826771653543	0.33464566929134
MBCR 203US	1.0269028871391	1.0826771653543	0.33464566929134
MBCR 203ES	1.0269028871391	1.0826771653543	0.33464566929134